Everything's possible.

Xerox[®] PrimeLink[®] C9265 / C9275 / C9281 Printer









Xerox

It's time to embrace agility.

When requests change by the minute, you need a printer that makes everything possible – luxury output, countless options for office and production-level feeding and finishing, with speedy, effortless workflows that help work get done faster. That's the all-new Xerox[®] PrimeLink[®] C9200 Series Printer.

NOW ANYONE CAN PRINT LIKE A PRO

You'll do more with PrimeLink®, a new light production engine that promises more power with print speeds of up to 81 prints per minute. Whether you run an office or agency, university or print production facility, PrimeLink® is ready to enhance your image with seamless support and the widest breadth of capabilities in the light production market.

LUXURY OUTPUT QUALITY

Image quality beyond what you'd expect from an office printer, with high-definition, highly engaging colour output. Plus:

Crisp, rich black text and pristine full-gamut colour graphics with High Definition Emulsion Aggregate (HD EA) Toner

Optimised 0.5 mm front-to-back registration to keep all your content right where you want it

More stable and accurate quality with new energy-efficient LED print technology providing 2,400 x 2,400 dpi imaging

Accurate density and colour quality with advanced Simple Image Quality Adjustment (SIQA)

Support for expanded Extra-Long Sheet (XLS) printing at greater sizes (1,300 mm)

Reliable envelope feeding in a wide array of sizes comes standard – no special kit required





WIDE RANGE OF FEEDING AND FINISHING

Effortless production of any run – small to large – with inline finishing on virtually any media ensures you're set up for success.

Offer more applications with more media flexibility up to 400 gsm, and sizes of up to 1,300 mm

Optimise your printer for every job with Custom Stock Libraries

Get big capability and productivity in a space-saving footprint

A PRINTER SO FUN TO USE, WORK WON'T FEEL LIKE WORK

When it comes to working better, it's all about efficiency and excellence. The new Integrated Colour Server for the Xerox® PrimeLink® C9200 Series Printer delivers that and more (standard) with ready-touse workflows and advanced print features, accessed via a 10 in. touchscreen for tap and print/copy/scan convenience.

The Xerox® EX and EX-i C9200 Series Print Servers Powered by Fiery® (optional) offer production tools familiar to print facilities and in-printers – including a wide range of Fiery® offerings for advanced colour management, job set-up and more.

SPEEDY, EFFORTLESS WORKFLOWS AND CUSTOMISATION

Time- and talent-saving automation with the potential to transform your workflows – and your working environment.

Accelerate your work with Xerox[®] FreeFlow[®] Core and other FreeFlow[®] Workflow Software solutions

Monitor, measure and manage

your printer or entire fleet with Xerox[®] FreeFlow[®] Vision Software

Connect and create with the Connect for XMPie app for creative new applications, including preloaded templates for personalisation

Seamlessly print from any device with support for mobile printing with Xerox[®] @PrintByXerox App

SUPER-SECURE FROM TODAY'S - AND TOMORROW'S - THREATS

With dozens of security features and certifications, PrimeLink® is ready to meet and exceed your organisation's protocols. Our multi-layered approach to security is designed around three principles to ensure ongoing protection and ensure compliance, whatever your field or industry.

All-new-from-the-ground-up Xerox® PrimeLink® C9200 Series Printer



Shown: Fiery® EX Print Server, Two-Tray Oversized High Capacity Feeder, Xerox® PrimeLink® C9200 Series Printer, Crease and Two-Sided Trimmer, Xerox® Production Ready Booklet Maker Finisher, Xerox® SquareFold® Trimmer

Speeds: 65 / 75 /

65 / 75 / 81 ppm

Media weights: Up to 400 gsm


Banner media: Up to 1,300 mm

Standard (5 tray) capacity:

3,500 sheets with optional One-Tray Oversized High Capacity Feeder (OHCF); 7,500 sheets with Two-Tray OHCF

- 1 Optional One- or Two-Tray Oversized High Capacity Feeders (OHCF)
- 2 Tray 5 (MSI / Bypass Tray)
- 3 Remote User Interface
- 4 Smart Proximity Sensor
- 5 Dual-Head Colour Scanner up to 270 ipm
- 6 Standard Trays 1–5
- 7 Optional Xerox® EX or EX-i C9200 Series Print Servers Powered by Fiery®
- 8 Standard Integrated Colour Server for the Xerox® PrimeLink® C9200 Series Printer

- 9 High Definition Emulsion Aggregate (HD EA) Toner
- **10** LED Print Technology
- 11 Intelligent/Advanced Decurler
- 12 Registration 0.5 mm front-to-back
- 13 Custom Stock Library
- 14 Redesigned Paper Path
- 15 Crease and Two-Sided Trimmer
- **16** Multiple finishing options for production print and office environments

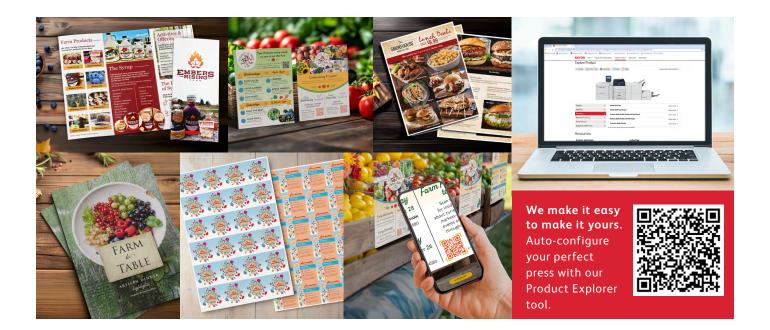

Xerox[®] PrimeLink[®] C9265 / C9275 / C9281 Printer

DEVICE SPECIFICATIONS	PRIMELINK C926	5	PRIMELINK C927	5	PRIMELINK C	9281
SIMPLEX SPEEDS	Colour	Black and white	Colour	Black and white	Colour	Black and white
A4	Up to 65 ppm	Up to 65 ppm	Up to 75 ppm	Up to 75 ppm	Up to 81 ppm	Up to 81 ppm
A3	Up to 34 ppm	Up to 34 ppm	Up to 37 ppm	Up to 37 ppm	Up to 42 ppm	Up to 42 ppm
SRA3	Up to 30 ppm	Up to 30 ppm	Up to 34 ppm	Up to 34 ppm	Up to 38 ppm	Up to 38 ppm
Printer Dimensions		1,575 mm; Depth: 793 mm (includ				
Monthly Duty Cycle	Up to 300,000 pages (maximum volume capacity expected in any one month, not expected to be sustained on a regular basis)					
Average Monthly Print Volume	10,000 to 60,000 pages (maximum volume capacity expected in any one month, not expected to be sustained on a regular basis)					
(AMPV)						
Paper Flexibility/Weights	Standard Paper Capacity: 3,500 sheets (Tray 1 & 2: 540 sheets, Tray 3: 890 sheets, Tray 4: 1,280 sheets, Tray 5 (MSI / Bypass): 250 sheets) Max. Paper Capacity: 7,500 sheets (Tray 1 & 2: 540 sheets, Tray 3: 890 sheets, Tray 4: 1,280 sheets, Tray 5 (MSI / Bypass): 250 sheets, Two-Tray Oversized High Capacity Feeder: 4,000 sheets) Sizes: Tray 1: A5 to SRA3; Tray 2: A5 to SRA3; Tray 3: B5, A4; Tray 4: B5, A4					
Image Quality Print Technology	Setting a new higher benchmark for light-production image quality with LED technology, 2,400 x 2,400 dpi resolution with advanced HD LED and HD EA Toner for exceptionable clarity and vibrant rich colours					
Line Screens	150 / 200 / 300 / 600 dot screen, 200 line screen, stochastic and enhanced text and graphics					
Registration	 Cutting-edge registration technology for tight control Simple Image Quality Adjustment (SIQA) for de-skew, registration and density uniformity (available on all configurations) +/- 0.5 mm. Variation will occur based on paper size, tray, etc. 					
Print Features	USB or Email, and mob Expansive media range postcards to posters, by up to 400 gsm Xerox Extensible Interfic connect to third-party set Inline finishing options banner printing, staplin stitching, crease and th stitched presentations, Be secure with integrat	lets you print everything from th coated and uncoated stock, ace Platform® (EIP) allows you to oftware solutions offer a professional polish with g, hole punching, folding, booklet ree-knife trimming for booklets, reports and newsletters ed security features such as IP te, secure print, encrypted Scan to	 1,295 mm XLS or Banner sheet size (Tray 5 and OHCF via Tray 5) supporting up to 220 gsm Up to 400 gsm media weight (Tray 5 and OHCF only), auto-duplex up to 350 gsm (Bypass Tray and OHCF) Xerox[®] replaceable units for toners, drums, fuser, charge corotron, waste bottle, staples Custom Paper Setup and Paper Catalogue Load-while-run toner and paper capability Remote UI and Smart Proximity Sensor Optional Features: Common Access Card Enablement Kit, Accounting Options, PostScript with Integrated Colour Server 			
Servers	Standard Optional • Integrated Colour Server for the Xerox® PrimeLink® C9200 Series Printer • Xerox® EX-i C9200 Series Print Server Powered by Fiery® (FS600 Platform) • Xerox® EX C9200 Series Print Server Powered by Fiery® (FS600 Platform) • Xerox® EX C9200 Series Print Server Powered by Fiery® (FS600 Platform)					
Integrated Scanner	Colour or black-and-wh	Duplex Document Feeder ite scanner • PDF, PDF/A, thumbnail preview,	 Up to 270 ipm (colour, up to 200 gsm) Up to 270 ipm (black-and-white, up to 200 gsm) Originals up to A3 in weights from 38 gsm to 200 gsm Auto Document Feeder and platen glass used with SIQA (Tray to Paper registration) 			
Optional Feeding	Optional High Capacity Feeder (HCF): 2,000 sheets; 184.2 x 266.7 mm, 279.4 x 215.9 mm / B5, A4; 64 to 220 gsm (uncoated and coated) Optional Oversized High Capacity Feeder (OHCF): One-Tray OHCF: 2,000 sheets plus Storage Cabinet; Tray 6: 100 x 148 mm to 330 x 488 mm (up to 400 gsm) Tray 5: Up to 330 x 1300 mm up to 400 gsm (XLS up to 220 gsm) Two-Tray OHCF: 4000 sheets; Tray 6 and 7: 100 x 148 mm to 330 x 488 mm (up to 400 gsm) Tray 5: Up to 330 x 1,300 mm up to 400 gsm (XLS up to 220 gsm)					
Optional Finishing	Business Ready Finisher 2.0: Offsetting Top Tray: 500 sheets A4 unstapled. Stacking Stapling Tray: 3000 sheets unstapled or 100 sets (dual or 4-position staple) 279 x 432 mm, 216 x 356 mm, A3 or 200 sets (single-position staple) A4. Sizes: Stacking: A6 to SRA3, Stapling: B5 to A3. Other; A5 output to top tray; punch and offset. Paper weights: Top Tray: 60 to 350 gsm (coated and uncoated).					
	 Business Ready Finisher Booklet Maker Finisher 2.0: Offsetting Top Tray: 500 sheets A4 unstapled. Stacking Stapling Tray: 1,500 sheets unstapled or 200 sets (single position staple) or 100 stapled sets of A3 / SRA3. 279 x 432 mm, 216 x 356 mm, A3 or 200 sets (single-position staple) A4. Sizes: Stacking: A6 to SRA3. Stapling: B5 to A3. Other: A5 output to top tray: punch and offset. Paper weights: Top Tray: 60 to 350 gsm (coated and uncoated), Stacker Tray: 60 to 350 gsm (coated and uncoated), Booklet Maker: 256 to 300 gsm cover (uncoated, 106 to 220 gsm (coated)). Booklet Maker / Sadele-stitch 2 to 16 sheets (7 sheets at 106 to 176 gsm coated) or 5 sheets at 177 to 220 gsm coated). Production Ready Finisher (requires Interface Decurler Module): Booklet Size: 100 sheets (90 gsm) uncoated, 35 sheets (90 gsm) coated. Paper Size: 182 x 146 mm to 297 x 432 mm. Max Weight: 350 gsm. Options: Punch, Inserter and C/Z Folder. Trays: Two output trays, 500 sheet top tray, 3,000 sheet stack tray of 148 x 146 mm to 330 x 488 mm. Production Ready Finisher Booklet Maker (requires Interface Decurler Module): Booklet Size: 182 x 182 mm to 330 x 488 mm up to 256 gsm. Trays: 500 sheet tray, 2,000 sheet stack tray, saddle-stitch booklet tray (up to 120 pages, 30 sheets / 90 gsm uncoated, 15 sheets / 106 gsm coated). 					
	Offset Catch Tray: 500 sheet stacking. Xerox® SquareFold® Trimmer Module: Face Trim: 120 pages (30 sheets). Compatibility: Production Ready Finisher, Booklet Maker, Crease and Two-Sided Trimmer. Xerox® C/Z Folder: Sheet Size: A4. Half-Z Fold Sheet Size: Larger stocks reducing to A4. Weight Range: 64 to 90 gsm. Compatibility: Production Ready Finisher, Booklet Maker. Xerox® Inserter: Capacity: 250 sheets. Capabilities: Trimming, punching, folding, stapling, stacking. Paper Size: 182 x 148 mm to 330 x 488 mm. Max Weight: 350 gsm. Compatibility: Production Ready Finisher. Xerox® Crease / Two-Sided Trimmer: Trim Range: 6 to 25 mm. Paper Size: 194 x 210 mm to 330 x 488 mm. Max Weight: 350 gsm. Compatibility: Production Deads (Fisher and Ready Habeland Production Produc					
	Ready Finisher and Booklet Maker. Buffering Unit: Up to five customisable mountain or valley creases per sheet. For more optional finishing refer to Product Explorer explorexeroxproducts.com/Product.					
Xerox App Gallery	Go to xerox.com/AppGallery to learn how you can expand the capabilities of the PrimeLink C9265 / C9275 / C9281 and work in new ways with dedicated apps for business, education, healthcare and more.					

Configurations vary by geographical location. For more information, go to **www.xerox.co.uk**

© 2025 Xerox Corporation. All rights reserved. Xerox®, PrimeLink®, SquareFold® and Xerox Extensible Interface Platform® are trademarks of Xerox Corporation in the United States and/or other countries. The information in this brochure is subject to change without notice. 01/25 TSK-6233 BR40622 P92BR-01EA